


Lightning Poles

SPECIFICATION

Other customizations in material, thickness, surface finishing, or section dimensions could be offered upon customer request.

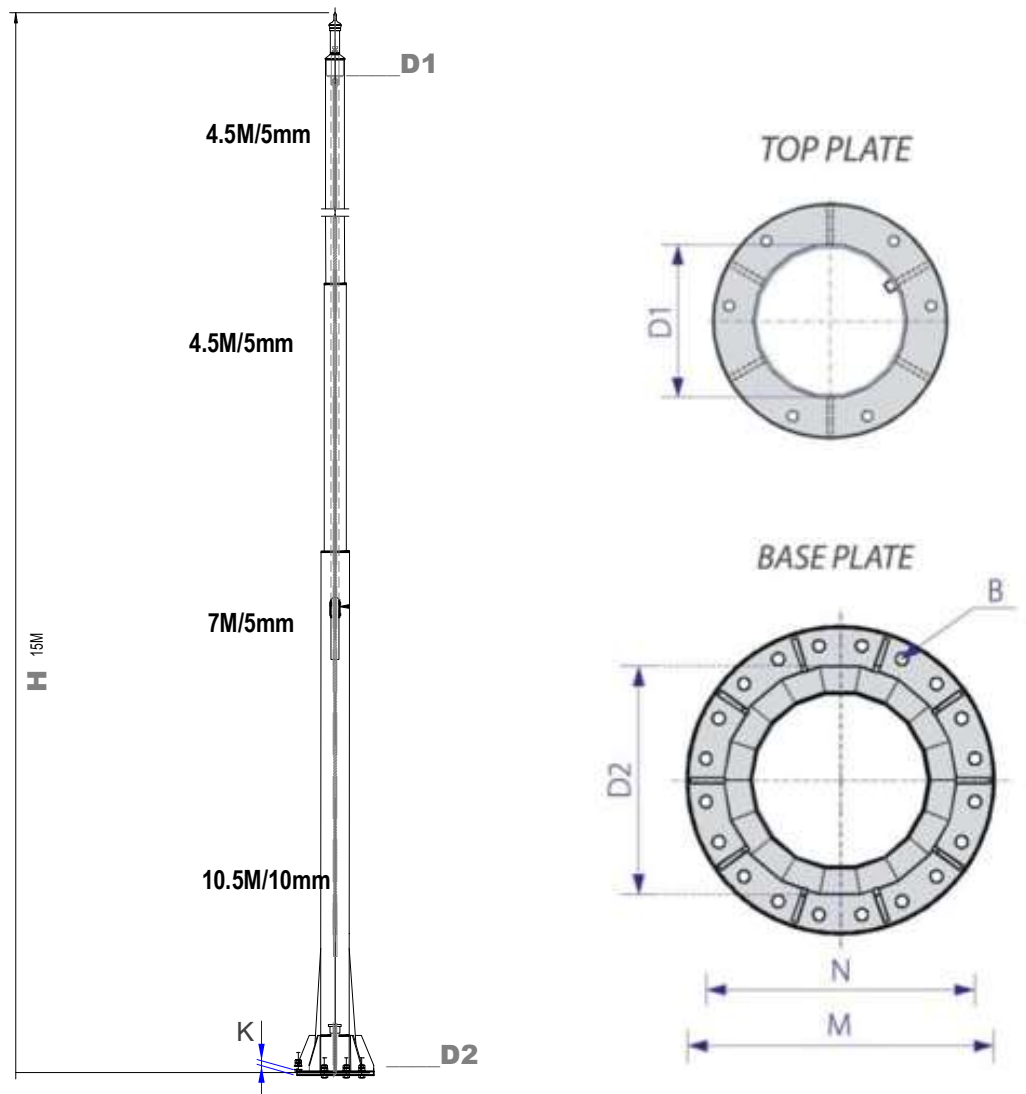


Cat No.	D1	D2	Height	No. Section/Thickness M/mm				Surface Finishing	Base plate			
Cat No.	Φ mm	Φ mm	H mm	1	2	3	4		Shape	M/N mm	K mm	B No.x Φ
LP15165300R	165	300	15000	4.5M /5mm	4.5M /5mm	7M /5mm	/	HDG	Round	500/450	30	8x Φ 25
LP20260540R	260	540	20000	5.6M /5mm	10.5M /6mm	10.5M /8mm	/	HDG	Round	850/750	30	20x Φ 36
LP25260601R	260	601	25000	5.6M /5mm	10.5M /6mm	10.5M /8mm	/	HDG	Round	850/750	30	20x Φ 36
LP30260673R	260	673	30000	10.5M /6mm	10.5M /8mm	10.5M /10mm	/	HDG	Round	900/800	30	20x Φ 42
LP35320790R	320	790	35000	7M /6mm	10.5M /8mm	10.5M /8mm	10.5M /10mm	HDG	Round	1000/900	50	20x Φ 42

Anchor Bolt Frame




Frame Type



ABF1

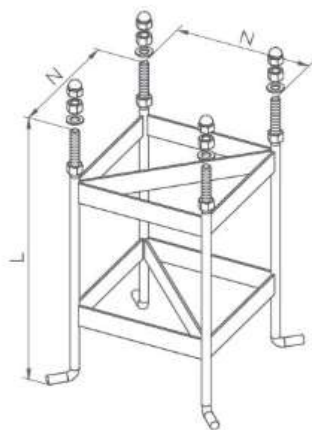

ABF2

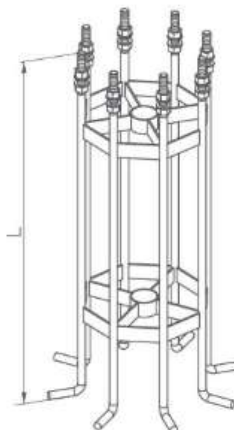

ABF0

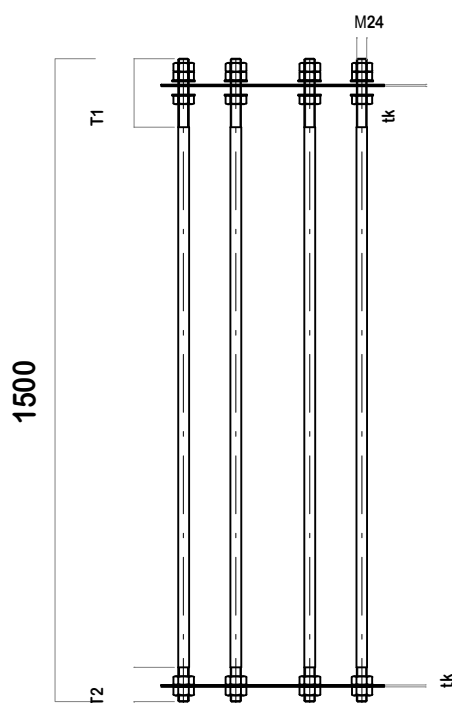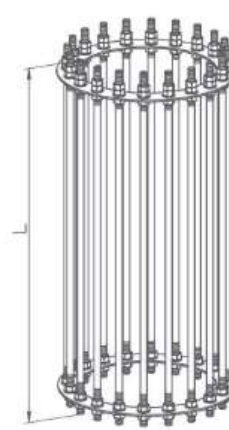


Example for code: ABF0I150M24

Frame type: ABF0

Bolt type : I

Bolt length: 1500mm

Bolt size: M24

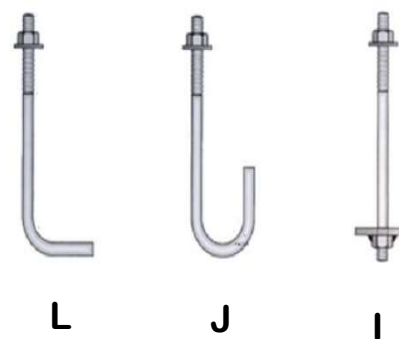

Bolt Type

► Other customizations could be offered upon customer request.

Images and drawings are for illustrative purposes only.

www.anphuc.vn

Add.012 Thai An 2 Building - Nguyen Van Qua St., Dong Hung Thuan Ward, Dist. 12, HCMC., VN Tel: 84-8-6256 2125 - Fax: 84-8-6256 2126